

POWERED BY

**Model :**  
**KDY-375/S**

PRP		ESP		Standby	Voltage/Ph	Hz/rpm	PF
kW	kVA	kW	kVA	Amps			
<b>300</b>	<b>375</b>	<b>330</b>	<b>413</b>	<b>595</b>	<b>400/3Ph</b>	<b>50/1500</b>	<b>0.8</b>

### Prime power


According to ISO8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during a 24-hour period shall not exceed 80% of the prime power. 10% overload is available for governing purposes only.

### Standby power

According to ISO 8528-1, it is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuous use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.

### Diesel Generator Set

Engine Make /Model	YTO YM6S9LF-D
Alternator Make /Model	Brushless, self-exciting
Control Panel	Smartgen HGM6110N
Base Frame / Silent Canopy	Robust Structure/ Corrosion Resistant
Circuit Breaker Type	3pole MCCB (4P Available as option)
Built in Base Fuel Tank Capacity	8-12hrs
Battery	Maintenance free Lead Acid

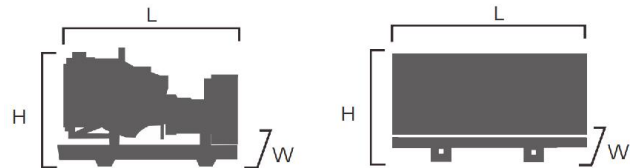

### Fuel Consumption

100% prime power	78.0 L/hr
------------------	-----------

### Dimension and Weight

Dimension	Open	Silent
Length (L)	3150mm	4200mm
Width (W)	1450mm	1700mm
Height (H)	1850mm	2000mm
Net Weight	2915KG	3800KG

## § Engine and Alternator Specification

Engine	
Engine Brand /Model	YTO YM6S9LF-D
Fuel injection system	Direct Inject
No. of cylinders	6
Bore	126mm
Stroke	155mm
Compression ratio	17.0:1
Displacement	11.596 L
Engine speed	1500 rpm
Rated power	350 KW
Intake type	Turbocharged With After Cooler
Cooling method	Forced watercooling
Governor	Electronic
Start motor	24V

Alternator	
Number of phase	3
Power factor (Cos Phi)	0.8
Poles	4
Winding Connections (standard)	Star-serie
Terminals	12
Insulation type	H class
Winding Pitch	2/3
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Couping	Flexible disc

## § Controller

### Configuration

- § Emergency stop button
- § Protection MCB
- § Battery charger
- § Integrated aviation plug
- § ATS connection
- § Digital control module



### Main Features

- § Automatic mains failure
- § Engine control, Generator protection
- § Built in alarms and warnings
- § Remote Start operation available
- § Daily / weekly / monthly exerciser
- § Weekly operation schedule programs
- § Fuel pump control
- § Mains simulation
- § Block heater control
- § Field adjustable parameters
- § Free MS-Windows Remote monitoring
- § LED displays
- § Configurable analogue inputs
- § I/O expansion capability

### Genset Option Features

- § Battery charge
- § Engine heater
- § Daily fuel tank
- § Auto Transfer Switch( ATS)
- § Parallel control panels
- § Circuit Breaker MCCB & ACB
- § Remote Control Panel
- § Weatherproof/soundproof Canopy
- § Trailer type Gensets

### Quality Standards

- § ISO9001:2000,ISO14000,ISO3046
- § ISO8528 BS4999
- § BS5514,AS1359,ICE34
- § CE Compliance

**Koten Power** reserves the right to modify the characteristics of its product at any time in order to incorporate the latest technological developments. The information contained in this document may therefore be changed without notice. For more technical data.